

DIAGNOSTIC-SWITCH PROmesh P10XD

Item no.: 114110216



HIGHLIGHTS

Integrated diagnostics:



- Online cable monitoring
- Network monitoring (network load, discards, errors)
- Leakage current monitoring



High Performance:

- Transfer rates up to 100 Mbit/s
- Quality of Service
- 8 Priority Queues

DIAGNOSTIC-SWITCH PROmesh P10XD | Technical Details

Network interfaces	
M12 d-coded ports	
Interfaces	10 (designation P1 - P10)
Transmission rates	10 Mbit/s 100 Mbit/s
Status LED	Link + data exchange
Further device interfaces	
Status LED	VDC Status Error
Power supply	M12, L-coded (designation X2 IN and X2 OUT)
Functional earthing (FE)	M4 screw connection
Supply voltage, current consumption, power loss, alarm contact	
Connections	
Power supply (L-coded)	2 x 0,2 – 2,5 mm ²
Redundant power supply	2 x 0,2 – 2,5 mm ²
Functional earthing (FE)	1 x 0,2 – 2,5 mm ²
Operating parameters	
Supply voltage (nominal value)	24 VDC
Supply voltage (min.)	12 VDC
Supply voltage (max.)	48 VDC
Current consumption (max.)	0,44 A
Power loss (max.)	5,2 W
Fuse protection (supply voltage input)	5 A/125 VDC
Design, dimensions, weight	
Design	Compact
Material (housing)	Metal
Mounting	Wall mounting
Width	60 mm
Height	284 mm
Depth	28 mm
Installation distance (vertical)	50 mm
Installation distance (horizontal)	50 mm
Weight (net)	950 g

DIAGNOSTIC-SWITCH PROmesh P10XD | Technical Details

Environmental conditions	
Operating temperature	-40 – 75°C
Storage temperature	-40 – 85°C
Humidity, rel.	5 – 95% non-condensing
Protection class	IP67
Functions	
Basic parameters	
Switching technology	Store-and-Forward
MAC address table	16 k
Switch memory	2 Mbit
Backplane capacity	20 Gbit/s
Throughput	14,88 Mpps
MTBF	40 years
Quality of Service (QoS)	
Queues per port	8
Prioritization functions	Port-based Class of Service (CoS) Type of Service (ToS)
Prioritization methods	Strict prioritization Weighted prioritization
Bandwidth control	Inbound and outbound
VLAN	
Protocol function	Port-based
Quantity	4096
Protocols/Services	
Management access	http https
Network access	SNMPv1 SNMPv2c SNMPv3 DHCP Client
E-mail	SMTP Client
Time synchronization	SNTP Client SNTP Server
Neighborhood	LLDP
IP setting	Static PROFINET DHCP
Multicast/Broadcast	Broadcast limitation IGMP Snooping (max multicast group is 512)
Redundancy	MRP Master MRP Client STP RSTP
Event log	Syslog


DIAGNOSTIC-SWITCH PROmesh P10XD | Technical Details

Applications	
PROFINET	
Standard	PROFINET 2.4
Device class	Device
Conformity class	B
Netload Class	III
Realtime Class	1
EtherNet/IP	
EtherNet/IP	EDS-file
Diagnosis	
Functions	
Line diagnostics	Online quality analysis
Port statistics	Errors Discards Network load/ms + Network load/s Neighborhood
Leakage current monitoring	Sampling rate 18 kHz Bandwidth 25.6 kHz Measuring range 0-10 A Resolution 1mA
Power supply	Sampling rate 1 kHz Measuring range 12-48 VDC Resolution 0.1 V
Temperature	Measuring range -40 - 75°C Resolution 1°C
Port Mirroring	Incoming or incoming and outgoing packets Multiple source ports possible
Alerting	
Trigger	Port (up, down, status change) Line quality Networkload Leakage current Neighborhood Supply voltage Temperature MRP Discards Errors
Receiver	PROFINET E-mail SNMP trap

DIAGNOSTIC-SWITCH PROmesh P10XD | Technical Details

Standards, guidelines, approvals	
EMC	
Guideline	2014/30/EU
Interference emission	EN 55032
Interference immunity	EN 61000-6-2
ESD	IEC 61000-4-2
Mechanical stability	
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Free fall	IEC 60068-2-32
Approval	
Europe	CE
USA	UL
Canada	CSA
Environment	
RoHS	2011/65/EU
REACH	1907/2006/EG
FCC	
Overvoltage protection	IEC 6100045, Level 3
EFT	IEC 6100044

DIAGNOSTIC-SWITCH PROmesh P10XD | Technical Drawing

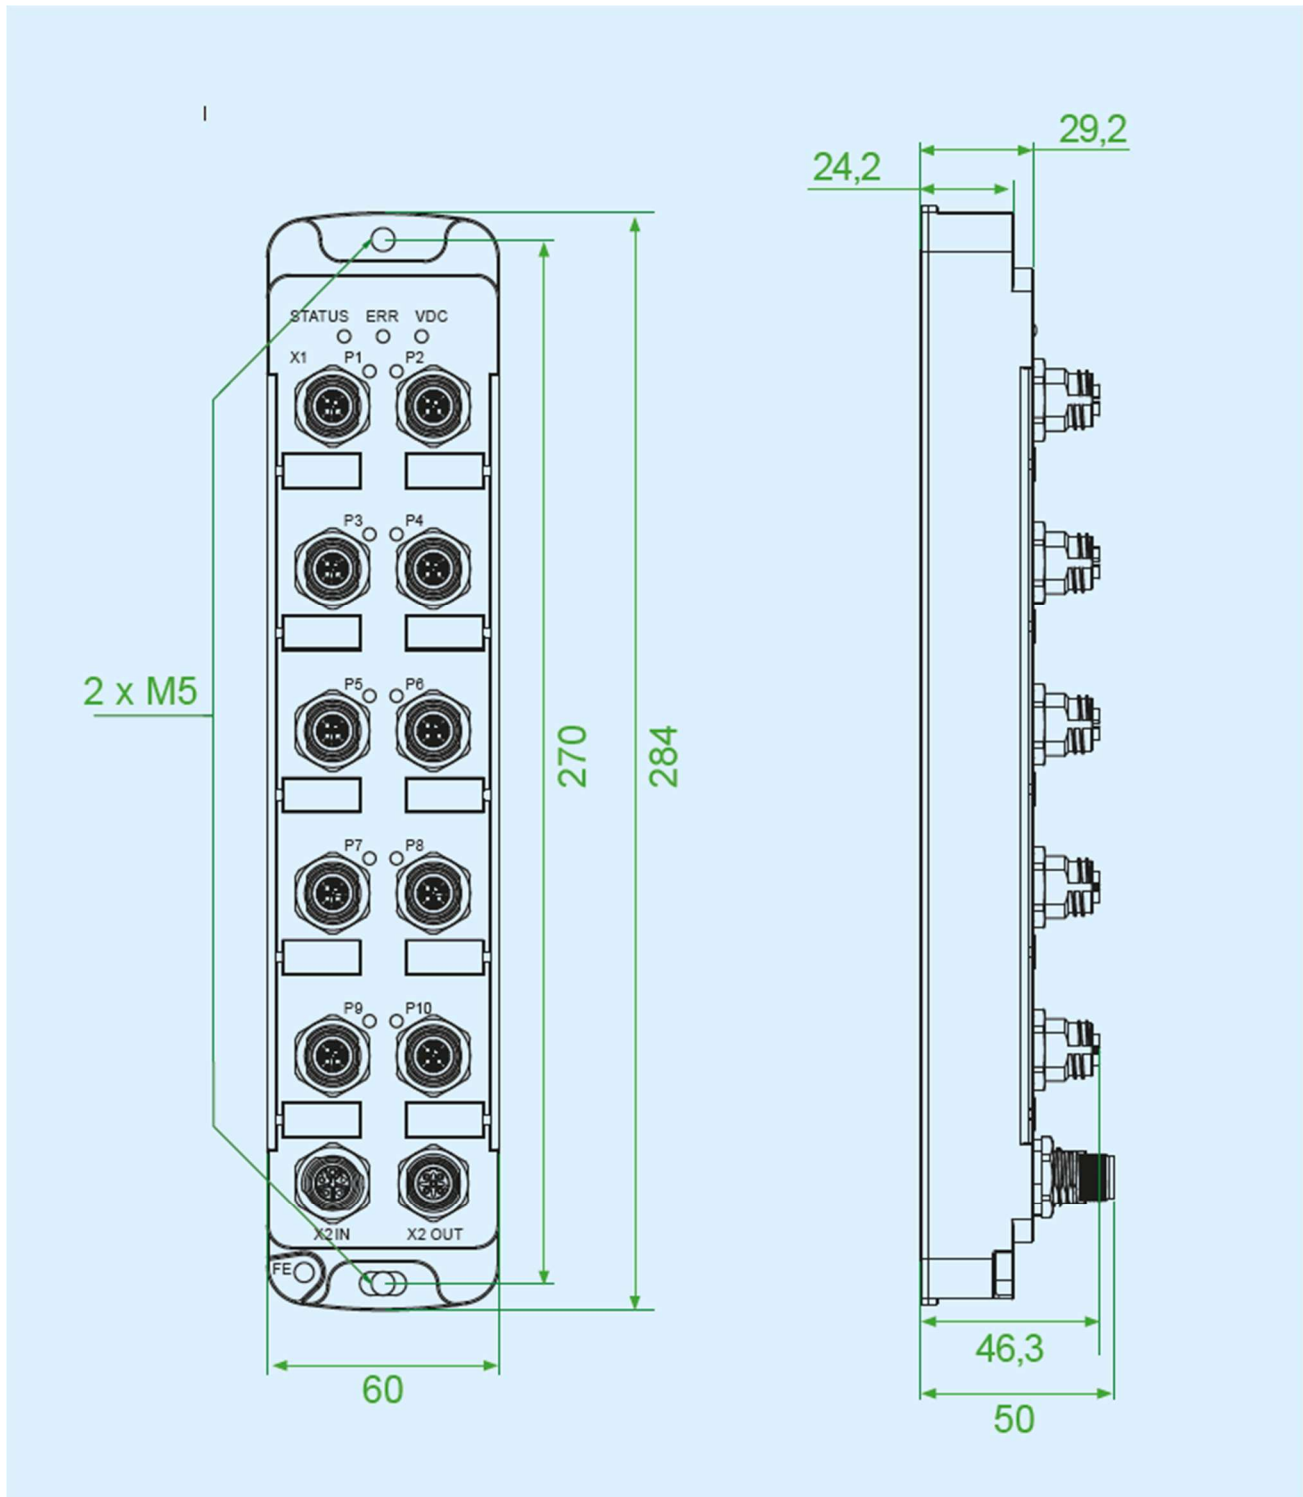

DIAGNOSTIC-SWITCH PROmesh P10XD | Pin Allocation

