

T piece M12, fully shielded, 12Mbps

Function

The **T piece M12** compact is used to connect PROFIBUS devices.

Ambient conditions


- Operating temperature: -30°C to +90°C
- Industrial protection: IP65, IP67, IP68

Design


- Contacts: Gold-plated brass
- Contact-carrier: Plastic violet
- Coupling nut: Nickel-plated brass
- Case: Plastic black
- Coding: M12 B-coded
- Shield: 360°




T piece M12

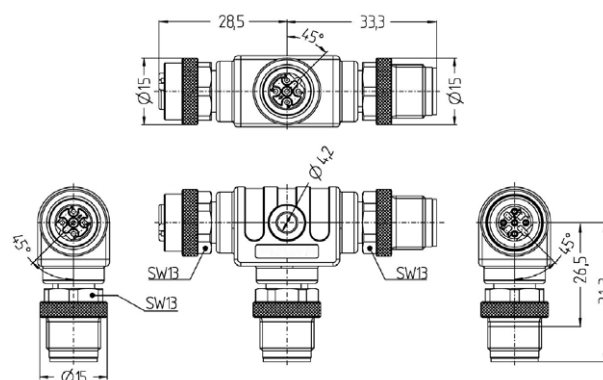

Engineering drawing

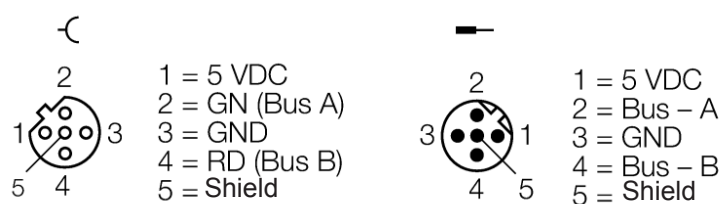

Pin assignment



Wiring diagram

Ordering details

Art. No.

T piece M12

110100009